



SB SERIES AERATOR

BUILT FOR RESULTS OVERBUILT TO LAST

Achieve maximum grass production from every acre with the new SB Series Aerator. Fracture the hardest soils with the robust design featuring RanchTech® blades and patented spiral drum in sizes designed to fit your soil type.

The durability instilled into every component of this implement is ready to tackle the toughest jobs. Hydraulic landing gear and multi-ply aircraft tires allows for easy transport even with water filled drums.

The RanchWorx® SB Series has a variety of customizations available. An adjustable drawbar allows for pulling of other implements behind the aerator. A broadcast seeder package means perfect seed dispersion behind the aerator to take advantage of the newly opened soils.

SB Series	MIN. HP	LBS PER FT.	DRY	W/ WATER
8' x 30"	40+	930	4,700 lbs	6,500 lbs
10' x 30"	60+	890	5,400 lbs	8,000 lbs
12' x 30"	70+	820	6,000 lbs	9,000 lbs
14' x 30"	80+	850	6,700 lbs	11,000 lbs
16' x 30"	110+	800	7,100 lbs	12,000 lbs
8' x 36"	70+	960	4,200 lbs	6,700 lbs
10' x 36"	80+	940	5,100 lbs	8,500 lbs
12' x 36"	90+	920	5,800 lbs	10,100 lbs
14' x 36"	110+	960	7,400 lbs	12,500 lbs
16' x 36"	130+	955	8,500 lbs	14,400 lbs
19' x 36"	145+	950	10,000 lbs	17,100 lbs

THE RANCHTECH® BLADE ADVANTAGE

The new RanchTech® blades have a beveled and tapered edge that sharpens with use. This new forged alloy gives the blades a **35,000+ acre** lifespan.

The RanchWorx® Advantage comes from the wide sharp blades and spiral design. This design allows for the weight of the unit to cut, not tear, the root system. Since the blades are truly no-till, the plants will respond quickly and favorably.

LIFETIME WARRANTY


AGAINST BREAKAGE ON RANCHTECH® BLADES

	RANCHTECH® BLADES	TINES	SPIKES	SHANKS
High work rate (5-11 mph)	✓			
Cut (not tear) root structure	✓	✓		
Brush management (up to 5 in. dia)	✓			
Lifetime warranty*	✓			
Reduce surface compaction	✓	✓	✓	✓
Reduce subsoil compaction	✓			
Grass stand setback				✓
Seasonal repair		✓	✓	✓

* All widths are measured from outside to outside of implement, drum width approx. 12" less, weights approx. Prices and specifications are subject to change. Tractor horse powers are suggested ranges and vary according to soil conditions and topography.

SL SERIES

SL3 SERIES

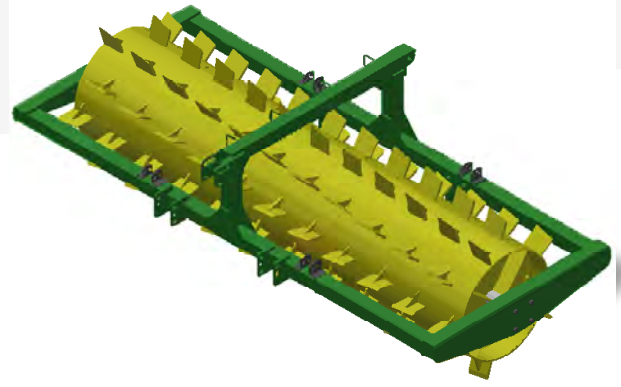

BUILT FOR RESULTS OVERBUILT TO LAST

The **SL Series** shares many functions and features of the well-known SB Series Aerators. When your application is relieving compaction, cutting the rhizome, and soil aeration – the SL Series gets the job done.

RanchWorx Aerators utilize new drum diameters to fit a wider range of HP applications, while still utilizing our Commercial-Grade RanchTech® Blades found on all RanchWorx® Series aerators.

The RanchWorx **SL3 Series** meets the needs of those who have smaller acreage or require an aerator that's highly maneuverable.

Offered in a variety of drum sizes, this series offers the benefits of a pull-type aerator. Each aerator includes a heavy-duty hydraulic lift system along with aircraft tires for transport.

The SL3 Series is a great option for smaller to medium applications.

THERE IS NO BETTER WAY TO AERATE THAN WITH RANCHTECH® BLADES

SL Series	MIN. HP	LBS PER FT.	DRY	W/ WATER
8' x 20" SL	30+	500	2,700 lbs	3,500 lbs
10' x 20" SL	40+	475	3,400 lbs	4,500 lbs
12' x 20" SL	50+	450	3,700 lbs	5,000 lbs
8' x 30" SL	40+	770	3,600 lbs	5,400 lbs
10' x 30" SL	50+	720	4,100 lbs	6,500 lbs
12' x 30" SL	60+	690	4,600 lbs	7,600 lbs

SL3 Series	MIN. HP	LBS PER FT.	DRY	W/ WATER
8' x 20" SL3	30+	370	1,800 lbs	2,600 lbs
10' x 20" SL3	40+	365	2,200 lbs	3,300 lbs
12' x 20" SL3	50+	360	2,700 lbs	4,000 lbs
8' x 30" SL3	40+	610	2,500 lbs	4,300 lbs
10' x 30" SL3	50+	605	3,100 lbs	5,500 lbs
12' x 30" SL3	60+	590	3,500 lbs	6,500 lbs

* All widths are measured from outside to outside of implement, drum width approx. 12" less, weights approx. Prices and specifications are subject to change. Tractor horse powers are suggested ranges and vary according to soil conditions and topography.



LIFETIME WARRANTY

AGAINST BREAKAGE ON RANCHTECH® BLADES

V23.2